




PRIME AV SOLUTIONS

ROE Vanish V8T

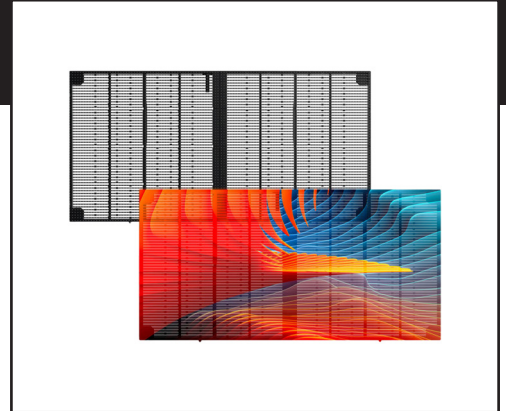

Title	V8T
Pixel Pitch	8.9mm
LED Configuration	SMD 1515 White
Max Brightness Calibrated	4000nits
Panel Dimensions	1000mm x 1000mm x 95mm 39.4" x 39.4" x 3.74"
Panel Resolutions (H x V)	112 x 112
Weight Per Panel	18.6kg 41lbs
Power Consumption Max/Average	530W / 265W
BTU Max/Average	1810 / 830
Transparency	46%
Servicability	Rear
Curving (Concave & Convex)	Concave 10° ~ Convex 10°
Viewing Angle Vertical	140°
Viewing Angle Horizontal	160°
Refresh Rate	3840Hz
With Depth	14bit

Operational Temp/Humidity	-20°C ~ 45°C, 10% ~ 90% RH -4°F ~ 113°F, 10% ~ 90% RH
Storage Temp/Humidity	-40°C ~ 60°C, 10% ~ 90% RH -40°F ~ 140°F, 10% ~ 90% RH
IP Rating	IP65
Certifications	CE, ETL, FCC
Scan Ratio	1/4
Max. Hanging	22 panels
Max. Stacking	12 panels
Processing	Megapixel

Please note: The specifications are for reference only, actual values may vary.